


# TS66

## UL VW-1

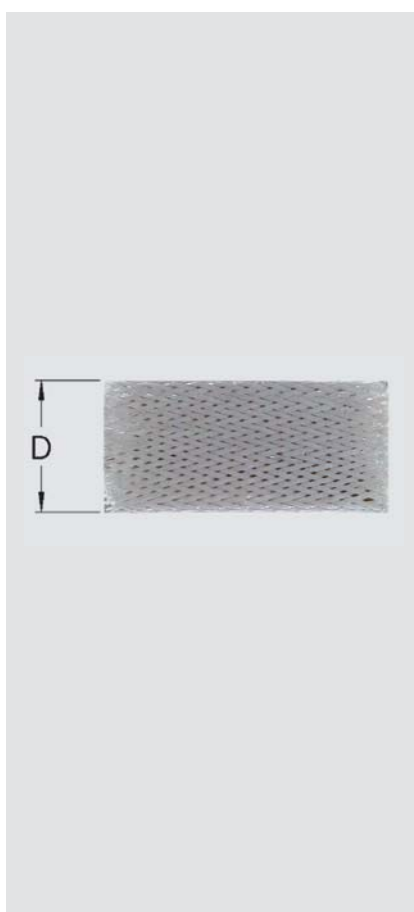

Internal nominal diameter in mm (D)	Packaging in mt
3	200
4	200
5	200
6	200
8	200
10	200
12	200
15	200
20	100
25	100
30	100
40	100
50	50
60	50

**EXPANDABLE BRAIDED  
NYLON 66 SLEEVING  
"SERIES TS66"**

### General features

The braided sleeving of the series TS66 is made from monofilaments of NYLON 66 and is particularly suitable for applications in which good resistance to abrasion and to UV rays is required.

It is self-extinguishing and insulating and is available in standard diameters from 3 mm to 60 mm.

Other diameters up to a maximum of 150 mm are available upon request.



## Technical features

• Working temperature	-60 °C ÷ +160 °C	
• Maximum temperature for a short time	+220 °C	
• Melting temperature	+256 °C	
• Flammability		ACCORDING TO STANDARD UL VW-1
• Directive	2002/95/CE RoHS	
• Standard colours	Gray - Black	
• Other diameters and colours	Upon request	
• Packaging	On reels	

**COMPANY WITH  
QUALITY SYSTEM  
CERTIFIED BY DNV  
= ISO 9001 =**

La RTE si riserva il diritto di apportare eventuali modifiche al presente catalogo senza preavviso. RTE reserves the right to make any modification to this catalogue without prior notice.  
I dati contenuti in questo catalogo sono basati su test che riteniamo validi, ma che non costituiscono garanzia implicita od esplicita. Potranno variare in qualunque momento in funzione di nuove conoscenze od esigenze, senza preavviso da parte della ns. società.  
*The information given in this catalogue is based on tests we believe to be valid, but it does not constitute intended or explicit guarantee. The information may vary at any time in accordance with updated knowledge and needs, without prior notification from our company.*

Consigliamo ai ns. clienti di valutare l'idoneità dei ns. prodotti secondo la loro applicazione specifica.  
*We recommend that our customers assess the suitability of our products in regard to their specific application.*

In nessun caso ci riterremo responsabili per qualsiasi eventuale danno, indiretto o conseguente alla vendita, rivendita, trasferimento, uso o uso improprio del prodotto.  
*In no case shall we be considered liable for any damages, whether indirect or in consequence of the sale, resale, transfer, use or incorrect use of the product..*